






#### The 120m-Multi-Man Series Double-Wall

(individual room) construction is a single or multiple occupancy room constructed of 4 inch thick modular panels, complete with carpeted vibration isolated floor, space-saver roof mounted ventilation, recessed electrical, Noise-Lock® doors and double glazed windows, audiometric jack panels acoustically matched and shipped ready for field assembly.

• NIC 70

### **Typical Plan**



Model No.	Inside Dimension ft-in x ft-in x ft-in					Outside Dimension ft-in x ft-in x ft-in					Weight
	L	x	W	x	D	L	x	W	x	Н	(lbs)
120m-1	2-10	х	3-6	х	6-6	4-10	х	5-6	х	8-1	2739
120m-2	3-6	х	6-8	х	6-6	5-6	х	8-8	х	8-1	3997
120m-4	6-2	х	6-2	х	6-6	8-2	х	8-2	х	8-1	5102
120m-6	7-6	х	6-2	х	6-6	9-6	х	8-2	х	8-1	5717
120m-8	8-8	х	6-1	х	6-6	10-8	х	8-2	х	8-1	6208
120m-10	10-10	х	6-2	х	6-6	12-10	х	8-2	х	8-1	7237

Divider curtains & stools provided for each station







#### **Total Estimated Design Weight:**

See table on page 1

#### Panel Construction:

Noise-Lock® V (interior walls), Noise-Lock® IV (exterior walls), Noise-Lock<sup>®</sup> VI (interior ceiling) and Noise-Lock<sup>®</sup> IV (exterior ceiling)

#### Panel Size:

Maximum panel size to be determined by customer for adequate site access.

#### Interior Surfaces:

22ga. galvanized perforated steel

#### **Exterior Surfaces:**

14ga. cold rolled solid steel

#### Floor Interior Surface:

11ga. hot rolled steel

#### Finish:

Textured powder coated

#### Door:

(2) 2'-9" wide x 6'-11/2" high clear opening camlift splitframe with push plate and pull handles.

#### Note:

- Dimensions locating door are shown to the clear opening
- Noise-Lock<sup>®</sup> STC-51
- Door leaf furnished with 1'-4" wide x 2'-0" high aluminum frame double glazed window
- Standard doors are double outswing

#### **Booth Vibration Isolation:**

Vibration isolator rails to be provided below floor panels

#### **Electrical:**

- 120V recessed incandescent light fixture
- 120V toggle switch for fans and lights
- 120V duplex receptacle

#### Note:

- Customer to provide 110V, 60Hz, 20 amp power to roof mounted quad receptacle power cord
- All electrical is wired per 2002 national electric code
- Booth is factory UL certified and labeled
- (Lot) boxes, connectors, etc. as required for complete installation

#### **Audiometric Jack Panel Comprised of:**

- Master jack and station jack panels
- or
- 9 pin connection with 2" pass through

#### **Booth Options:**

#### Ventilation:

Integrated SpaceSaver exhaust/inlet air ceiling silencer panels and 120V, 60Hz, 14w fans or HVAC connection collars to connect to building system

#### Available Colors:

- Khaki Shade Kinetic Khaki
- Polar Blue
- Colony Blue • Limoge Cream • Cinnamon Stick
- Celedon
  - Jade Market Silver Plate
- First Star
- Pure White • Gray Primer

#### Floor Covering:

Nylon carpet, to match paint color selection with 3/8" thick underlayment and 2-1/2" H black cove base molding included

#### Site Requirements:

- Customer to provide a finished floor which is within +/- 1/4" of level in 10 non-cumulative feet
- 2" minimum clearance is required between the exterior of testing booth and host facility walls/ceiling



**IAC** Acoustics North Aurora, Illinois T: 630 270 1790 F: 630 966 9710 E: iacacoustics@soundseal.com

www.iacacoustics.com Ref#: 120m-170315-01



# Accutone2 Series Audiometric Room Options

a division of sound seal

## Doors:

- Noise-Lock<sup>®</sup> double-glazed windows in door
  - 12" x 12" View Port
  - 16" x 24" Side Light
  - 20" x 60" Full Glass
- Additional & oversized doors including double leaf
- Wood veneered door finishes
- Mortised type, lever handle, recessed key locks
- Door closers



# Standard Enhancement Packages:

- Enhancement packages available with choice of fabric & liner colors
- Paneling & carpeting in 5 colors
- Absorptive & aesthetic fabric top paneling
- Space-enhancing chair-rail
- Edge-smoothing corner panels





# **Optional Equipment:**

- One-way Noise-Lock<sup>®</sup> glass
- One-way Noise-Lock<sup>®</sup> glass on sliding rails
- RF & electromagnetic shielding
- Special jack-panels
- Pass throughs
- Fire rated outer walls and doors



# Exterior Enhancement Packages:


- Exterior enhancement packages available with WoodTrends by Sound Seal
- Aesthetically pleasing finishes that show off the beauty of real wood
- Available in a variety of popular as well as exotic wood veneer species (additional veneer options available upon request)



Data Sheet 120m-Multi Audiometric Booth



# **Enhanced Performance Audiometric Series**

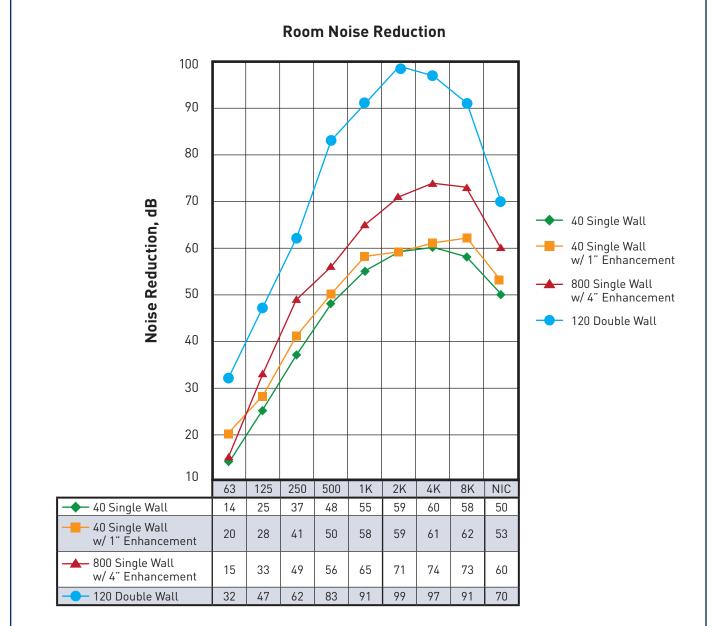

**Octave Band Center Frequency, Hz** 



IAC Acoustics North Aurora, Illinois T: 630 270 1790 F: 630 966 9710 E: iacacoustics@soundseal.com

www.iacacoustics.com Ref#: 120m-170315-01